

DRILLGUARD™

TM



Provides Complete Operator Protection!

Interchangeable bushings available to accommodate most drill press quill sizes.

FEATURES:

- Complete operator vision and protection assured.
- Smooth telescopic action via patented spiral guide grooves-window caged housing moves up while drill comes down; hence cutting tool is totally guarded.
- For drill changes - simply pull down on housing. Three spring loaded ball catches disengage and the housing drops out. Conversely, it quickly snaps back in place.
- Inner cage moving down protects window hence the operator from metal slivers.

Quality made of heavy duty material, Drillguard comes complete with installation and operation instruction. The Quill Ring (which holds cage housing) is made of heavy die-cast aluminum, with smooth finish.

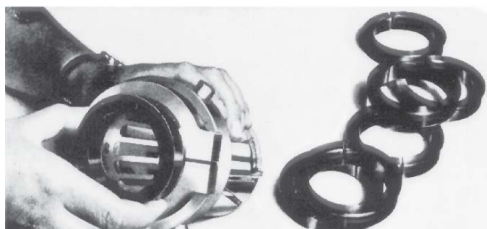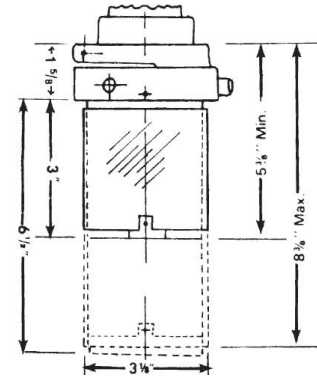

Order No.	Description	Fits Quill Dia. (inches)	
		Up to	from
13125	Drillguard	2.75" to	2.626"
13127	Bushing	2.625" to	2.563"
13128	Bushing	2.562" to	2.501"
13129	Bushing	2.500" to	2.438"
13130	Bushing	2.437" to	2.376"
13131	Bushing	2.375" to	2.313"
13132	Bushing	2.312" to	2.251"
13133	Bushing	2.250" to	2.188"
13134	Bushing	2.187" to	2.126"
13135	Bushing	2.125" to	2.063"
13136	Bushing	2.062" to	2.000"
		(or Metric Equivalent)	
13126	Acrylic	(Fits All)	
Replacement Windows			
While maximum diameter shown is 2 3/4", the mounting collar can be chucked and bored out to 2 7/8" diameter or slightly more.			